

# ROLLS

## MX28 Mini-Mix VI



### MX28 MINIMIX VI

- Three stereo inputs - 2: 1/4" unbal per channel.
- Individual 1/4" Right and Left outputs
- Pan control for each channel
- Two Stereo Phone Outs; 1/4" and 1/8" (3.5mm)

The MX28 is the ideal mixer for anyone needing to mix up to three stereo signals. Keyboards, stereo guitar effects, even sources like CD players or cassette players can be mixed together maintaining their true stereo separation.

#### SPECIFICATIONS

Input Impedance:	10K $\Omega$
Output Impedance:	100 $\Omega$
Max Gain:	+27 dBV
Max Input Level:	+30 dBV
Max Output Level:	+13 dB
Frequency Response:	20Hz - 20kHz +/- 1 dBV
THD + Noise:	<.005%
Power:	12 VDC 150 mA adapter (center negative)
Weight:	1.2 lbs. (.49 Kg)
Size:	4.25" x 1.75" x 4.5" (WxHxD)



Rolls Corporation  
Salt Lake City, UT  
10/18



## Owners Manual

Thank you for your purchase of the MX28 MiniMix VI. The MX28 is a three channel true stereo mixer designed for keyboard or other stereo line level signal mixing.


### INSPECTION

1. Unpack and inspect the MX28 box and package.

If obvious physical damage is noticed, contact the carrier immediately to make a damage claim. We suggest saving the shipping carton and packing materials for safely transporting the unit in the future.

2. Please complete the Warranty Registration Card and return it to the factory.

### DESCRIPTION FRONT PANEL

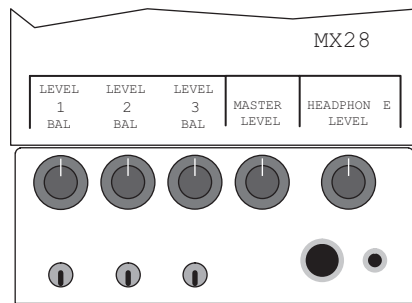

**LEVEL 1 - 3: Volume Controls:**

Adjusts the amount of input signal to the indicated channel.


**MASTER LEVEL:** Master volume control, adjusts the amount of overall signal sent to the Main Right and Left outputs.

**HEADPHONE LEVEL:** Adjusts the amount of signal sent to the Headphone Output.

**PAN 1 - 3:** varies the relative amount of right and left signal from the channel to the mix bus.

**PHONE OUTS:** 1/4" and 1/8" (3.5mm) TRS Stereo jacks for connection to stereo headphones.

### REAR PANEL

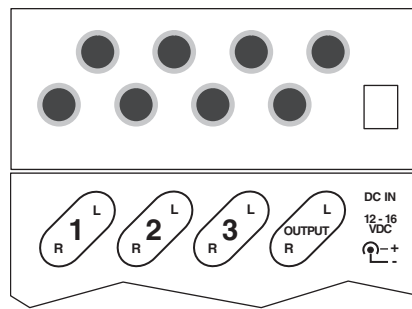

**CH 1 - Ch 3 INPUTS:** 1/4" unbalanced inputs


The Right input is the MONO input.

**Right and Left MAIN OUTPUTS:** 2: 1/4" unbalanced outputs containing the three mixed stereo signals.

**DC IN:** Power jack - accepts +12 to +16 volts DC (outside of the barrel is positive).

### OPERATION

Shown below is an example setup for the MX28. The power adapter is not shown. It should be connected to the proper voltage, grounded AC outlet.

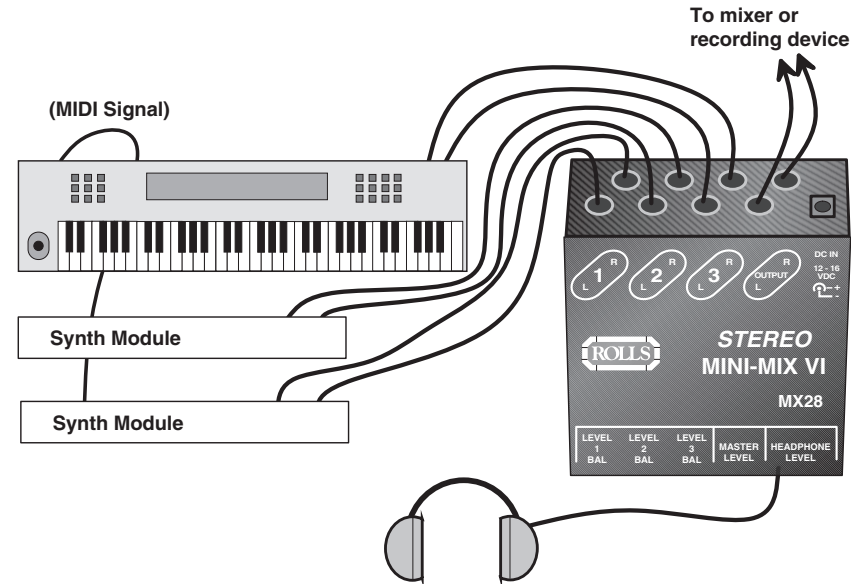

### SCHEMATIC

